


KRUPP

IT 01 - SELF AMALGAMATING INSULATING TAPE

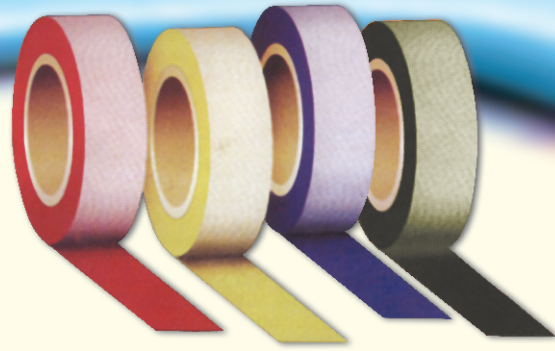

KRUPP Self Amalgamating Insulating Tape is specially prepared for electrical and electronic industry, panel makers, projects, electrical contractors, electrical utilities etc.

KRUPP Self Amalgamating Insulating Tape possesses excellent electrical properties and resistance to polluted atmosphere and water. This tape is specially designed for insulation, corrosion protection and environmental protection to various electrical parts.

■ The Salient Features ■

- Easy to Use.
- Excellent Electrical Properties such as superior volume resistivity, higher breakdown voltage etc.
- Excellent resistance to polluted atmosphere, Saline water and weather.
- Exceptional Ozone Resistance.
- Excellent Self Amalgamating Properties.
- Beneficial when compared with PVC heat Shrinkable Sleeves or PVC tape.
- Available in **R** **Y** **B** **B** Colours.

■ Technical Data and Physical Properties ■

- Colour **Red** **Yellow** **Blue** **Black**
- Std. Packing size - 40 mm, 5 meter (1 mm. Thick).
- Shelf Life - 18 months.
- Safe working temp. - up to 100°C.
- Dielectric Strength - 22 Kv / mm.

■ How to use ■

The tape contains plastic liner. Apply tape on the busbar or wire with half lap position and with 25 to 30% stretch, to achieve excellent results. The tape will start amalgamating with 1 to 1 ½ hour and will fully amalgamate within 24 hours.

■ Applications ■

- For busbars and busbar Taps - This tape is highly suitable for wrapping the copper or Aluminium busbars, in LT or HT panel. The excellent electrical properties and easy application method gives many advantage over conventional PVC tape or PVC shrink film.
- For Overhead Service Connection, Jumper Wires, Transformer Connections etc.
- For Terminations, Splicing, Corrosion or Enviro Protection of wires and cables.
- For wrapping HT bare conductors in Urban Areas, where it is hazardous to human.
- For applying HT bare conductors where frequent bird fault may occur.
- For making insulating, weatherproof joint for telecommunication cable.
- For sealing the entries of PVC cables in Street light boxes, Distribution boxes, Motor Terminal boxes, Feeder Pillar Boxes, electrical panels, telephone junction boxes etc.

■ Packing Details ■

- Each tape is packed in separate carton.
- 12 Cartons in each shipper 3.600 Kg. Gross Weight of Shipper 5.000 Kg.



Virgo Specialties Private Limited

K-33, Old Sonal Industrial Estate, Ramchandra Lane, Kachpada, New Link Road, Malad (W), Mumbai - 400 064.
Telefax : +91-22-2880 5469 / 2881 7550 • Email : virgospecialties@rediffmail.com